This document was produced by scanning the original publication.
Ce document est le produit d'une numérisation par balayage de la publication originale.

Refer to this map as: 11 K EDITION 2 MCE SERIES A 501

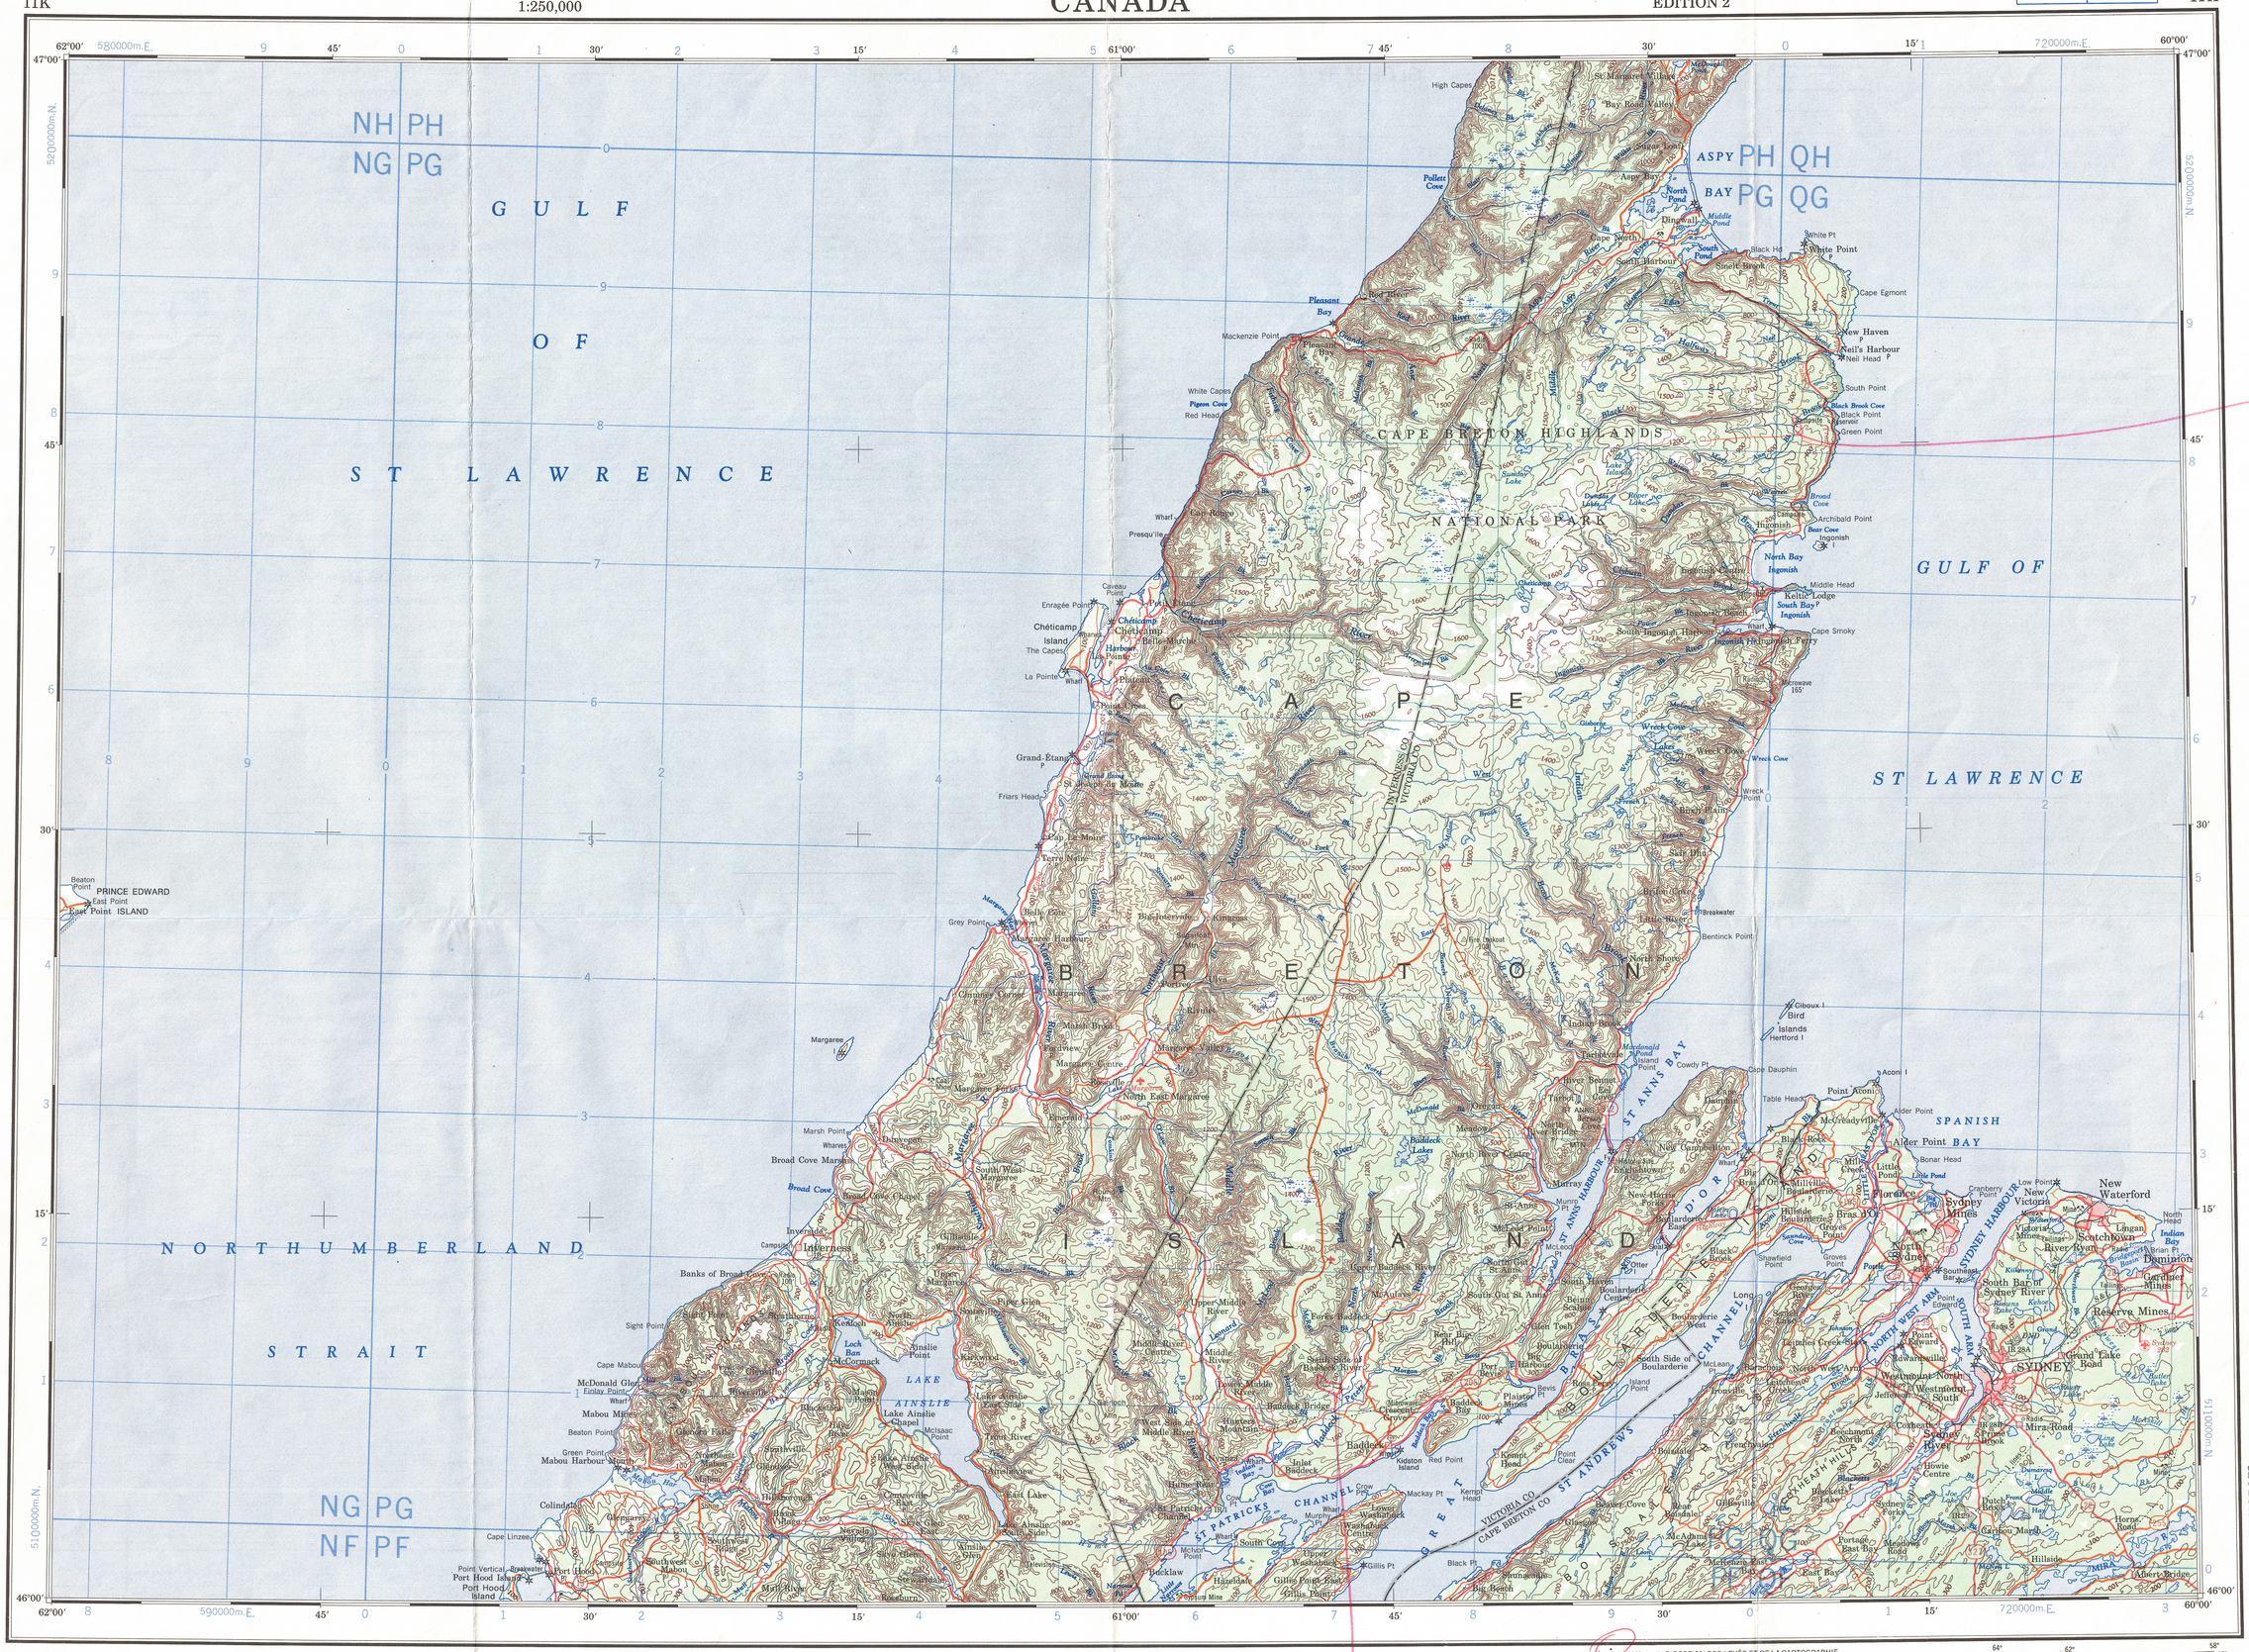

Am. FALLS To Blueline May 19/87

GRID ZONE DESIGNATION	100,000 M. SQUARE IDENTIFICATION		
20 T	NH	PH	QH
	NG	PG	QG
	NF	PF	QF

TO GIVE A REFERENCE TO NEAREST 1000 METRES

EXAMPLE: FIRE LOOKOUT TOWER

SQUARE: Read letters of 100,000 m. square — PG

EASTING: Read number on grid line immediately to left of point — 7; Estimate tenths of a square from this line eastward to point — 8 — 78

NORTHING: Read number on grid line immediately below point — 4; Estimate tenths of a square from this line northward to point — 4 — 44

MILITARY GRID REFERENCE (to nearest 1,000 metres) — PG7844

If reporting beyond 18° in any direction, prefix Grid Zone Designation as: 20T PG7844

TEN THOUSAND METRE UNIVERSAL TRANSVERSE MERCATOR GRID ZONE 20

Produced, 1969, by the SURVEYS AND MAPPING BRANCH, DEPARTMENT OF ENERGY, MINES AND RESOURCES, from large scale maps updated from aerial photographs taken in 1966. Field surveys 1936 and 1951. Culture check 1968. Printed 1972.

Magnetic declination 1970 varies from 25°21' westerly at centre of west edge to 25°56' westerly at centre of east edge. Mean annual change 1.5' easterly.

Roads:

	dual highway	more than 2 lanes
hard surface, all weather		
hard surface, all weather	2 lanes	less than 2 lanes
loose or stabilized surface, all weather	2 lanes or more	less than 2 lanes
loose surface, dry weather		
cart track		
trail or portage		

FOR COMPLETE REFERENCE SEE REVERSE SIDE

SYDNEY

NOVA SCOTIA - PRINCE EDWARD ISLAND

Scale 1:250,000 Échelle

Miles 5 0 5 10 15 20 Milles

Kilometres 5 0 5 10 15 20 25 30 Kilomètres

CONTOUR INTERVAL 100 FEET
Elevations in Feet above Mean Sea Level
North American Datum 1927
Transverse Mercator Projection

Copies may be obtained from the Map Distribution Office, Department of Energy, Mines and Resources, Ottawa.

ÉQUIDISTANCE DES COURBES 100 PIEDS
Élévations en pieds au-dessus du niveau moyen de la mer
Système de référence géodésique nord-américain, 1927
Projection transverse de Mercator

Ces cartes sont en vente au Bureau de distribution des cartes, ministère de l'Énergie, des Mines et des Ressources, Ottawa.

Établie en 1969, par la DIRECTION DES LEVÉS ET DE LA CARTOGRAPHIE, MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES RESSOURCES, d'après des cartes à grande échelle mises à jour à l'aide de photographies aériennes prises en 1966. Levés sur le terrain en 1936 et 1951. Vérification des ouvrages en 1968. Imprimée en 1972.

La déclinaison magnétique pour 1970 varie de 25°21' Ouest au centre de la limite Ouest à 25°56' Ouest au centre de la limite Est. Variation moyenne annuelle 1.9'Est.

Routes:

	2 chaussées séparées	plus de 2 voies
pavée, toute saison		
pavée, toute saison	2 voies	moins de 2 voies
gravier agglomméré, toute saison	2 voies ou plus	moins de 2 voies
de gravier période sèche		
de terre		
sentier ou portage		

POUR UNE LISTE COMPLÈTE DES SIGNES, VOIR AU VERSO



Index to adjoining Maps of National Topographic System
Tableau d'assemblage du Système national de référence cartographique

SYDNEY
11K
EDITION 2

SEP - 1 1981
REPRINT
TOPOGRAPHICAL SURVEY DIRECTORATE
SERVICE TOPOGRAPHIQUE
DATE 30 05 81
Q.C. APPROVES RELEASE
C.Q. APPROUVE
SEP 1981