


Refer to
this map as:

105 M
EDITION 3 MCE
SERIES A 502



TEN THOUSAND METRE
UNIVERSAL TRANSVERSE MERCATOR GRID
ZONE 8

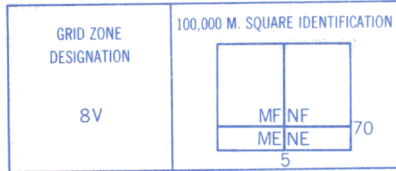

EXAMPLE OF METHOD USED
TO GIVE A REFERENCE TO NEAREST 1000 METRES

THE FOLLOWING GRID REFERENCE IS A SAMPLE ONLY
AND DOES NOT REFER TO A POINT ON THIS MAP

1 NU
0 NT
9

3 4 5 6

REFERENCE POINT ROCKS (as above)


SQUARE: Read letters of 100,000 m. square NU

EASTING: Read number on grid line immediately to left of point Estimate tenths of a square from this line eastward to point.


NORTHING: Read number on grid line immediately below point Estimate tenths of a square from this line northward to point.

EXAMPLE MILITARY GRID REFERENCE NU5404

If reporting beyond 18° in any direction, prefix Grid Zone Designation as: 15VNU5404

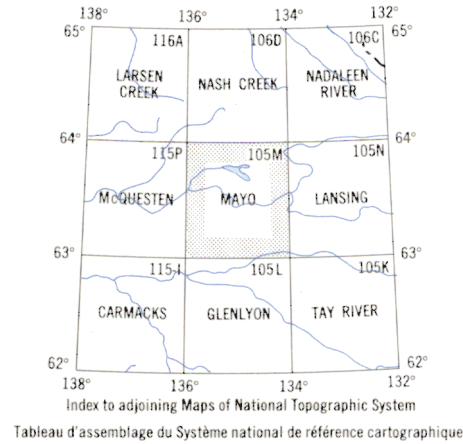

RELIABILITY DIAGRAM - CROQUIS D'EXACTITUDE



A Large scale mapping, photogrammetric, 1969.

A Cartographie à grande échelle, photogrammétrique, 1969.

Produced, 1969, by the SURVEYS AND MAPPING BRANCH,
DEPARTMENT OF ENERGY, MINES AND RESOURCES.
Printed 1971.

Magnetic declination 1970 varies from 33°15' Easterly at
centre of west edge to 34°03' Easterly at centre of east
edge. Mean annual change 4.2' Westerly.


Interim corrections 1977

Roads:
loose or stabilized surface, all weather..... 2 lanes or more less than 2 lanes
loose surface, dry weather.....
cart track.....
trail or portage.....

FOR COMPLETE REFERENCE SEE REVERSE SIDE

MAYO

YUKON TERRITORY



CONTOUR INTERVAL 500 FEET
Elevations in Feet above Mean Sea Level
North American Datum 1927
Transverse Mercator Projection

ÉQUIDISTANCE DES COURBES 500 PIEDS
Élévations en Pieds au-dessus du niveau moyen de la mer
Système de référence géodésique nord-américain, 1927
Projection transverse de Mercator

Copies may be obtained from the Map Distribution Office,
Department of Energy, Mines and Resources, Ottawa.

Ces cartes sont en vente au Bureau de distribution des cartes
ministère de l'Énergie, des Mines et des Ressources, Ottawa.

Établie en 1969, par la DIRECTION DES LEVÉS ET DE LA CARTOGRAPHIE,
MINISTÈRE DE L'ÉNERGIE, DES MINES ET DES RESSOURCES. Im-
primée en 1971.

La déclinaison magnétique pour 1970 varie de 33°15' Est
au centre de la limite Ouest à 34°03' Est au centre de la
limite Est. Variation moyenne annuelle 4,2' Ouest.

Corrections Provisoires, 1977

Routes:
gravier aggloméré, toute saison..... 2 voies ou plus moins de 2 voies
de gravel période sèche.....
de terre.....
sentier ou portage.....

POUR UNE LISTE COMPLÈTE DES SIGNES, VOIR AU VERSO